




U7 Pro Wall

U7-Pro-Wall

Datasheet | In The Box | Marketing Images | Accessories | Installation Guide





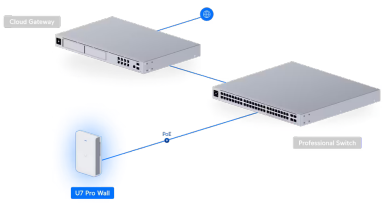

Overview

Dimensions	150 x 103 x 36 mm (5.9 x 4.1 x 1.4")
WiFi Standard	WiFi 7
Spatial Streams	6
Coverage Area	140 m² (1,500 ft²)
Max. Client Count	300+
Uplink	2.5 GbE
Mounting	Wall (Mount Included)
Power Method	PoE+

Performance

MIMO	
6 GHz	2 x 2 (DL/UL MU-MIMO)
5 GHz	2 x 2 (DL/UL MU-MIMO)
2.4 GHz	2 x 2 (DL/UL MU-MIMO)
Max. Data Rate	
6 GHz	5.8 Gbps (BW320)
5 GHz	4.3 Gbps (BW240)
2.4 GHz	688 Mbps (BW40)
Antenna Gain	
6 GHz	6 dBi
5 GHz	5 dBi
2.4 GHz	4 dBi
Max. TX Power	
6 GHz	23 dBm
5 GHz	26 dBm
2.4 GHz	22 dBm
Max. BSSIDs	8 per Radio
Supported Data Rates	
802.11be (WiFi 7)	7.3 Mbps to 5.8 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/240/320)
802.11ax (WiFi 6/6E)	7.3 Mbps to 2.4 Gbps (MCS0 - MCS11 NSS1/2, HE 20/40/80/160)
802.11ac (WiFi 5)	6.5 Mbps to 1.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)
802.11n	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)

Features

Wireless Meshing	✓
Band Steering	✓
802.11v BSS Transition Management	✓
802.11r Fast Roaming	✓
802.11k Radio Resource Management (RRM)	✓
Advanced Radio Management	✓
Passpoint (Hotspot 2.0)	✓
Captive Hotspot Portal	
Custom Branding Landing Page	✓
Voucher Authentication	✓
Payment-Based Authentication	✓
External Portal Server Support	✓
Password Authentication	✓
Guest Network Isolation	✓
Private Pre-Shared Key (PPSK)	✓
WiFi Speed Limiting	✓
Client Device Isolation	✓
WiFi Schedules	✓
RADIUS over TLS (RadSec)	✓
Dynamic RADIUS-assigned VLAN	✓

^ Hardware

Max. Power Consumption	22W
Supported Voltage Range	44-57V DC
Networking Interface	(1) 1/2.5 GbE RJ45 port
Weight	580 g (1.3 lb)
Management	Ethernet
Enclosure Material	Polycarbonate, aluminum
Mount Material	Aluminum
LEDs	
System	White/Blue
Channel Bandwidth	HT 20/40, VHT 20/40/80/160, HE 20/40/80/160, EHT 20/40/80/160/240/320 (MHz)
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 10022-24-08356
Operating Frequency	US/CA: 2400 - 2472 MHz U-NII-1: 5150 - 5250 MHz U-NII-2A: 5250 - 5350 MHz U-NII-2C: 5470 - 5725 MHz U-NII-3: 5725 - 5850 MHz U-NII-5 to U-NII-8: 5925 - 7125 MHz Worldwide: 2400 - 2483.5 MHz 5150 - 5850 MHz 5925 - 7125 MHz
Ambient Operating Temperature	-30 to 60° C (-22 to 140° F)
Ambient Operating Humidity	5 to 95% noncondensing

Software

Application Requirements	
UniFi Network	Version 8.1.113 and later

Stay in Touch

Email

Subscribe

Terms of Service | Privacy Policy | Legal | Cookies Settings

© 2026 Ubiquiti, Inc. All rights reserved.