

Analog Apartment Solution

---An Economical Choice For Intercom

Oversea Product Presales Team

Content

Analog Apartment Solution Overview

System Architecture& Function Introduction


Solution Highlights

More Economical Solution Realizes More Value

Analog Indoor Station

VS

IP Indoor Station

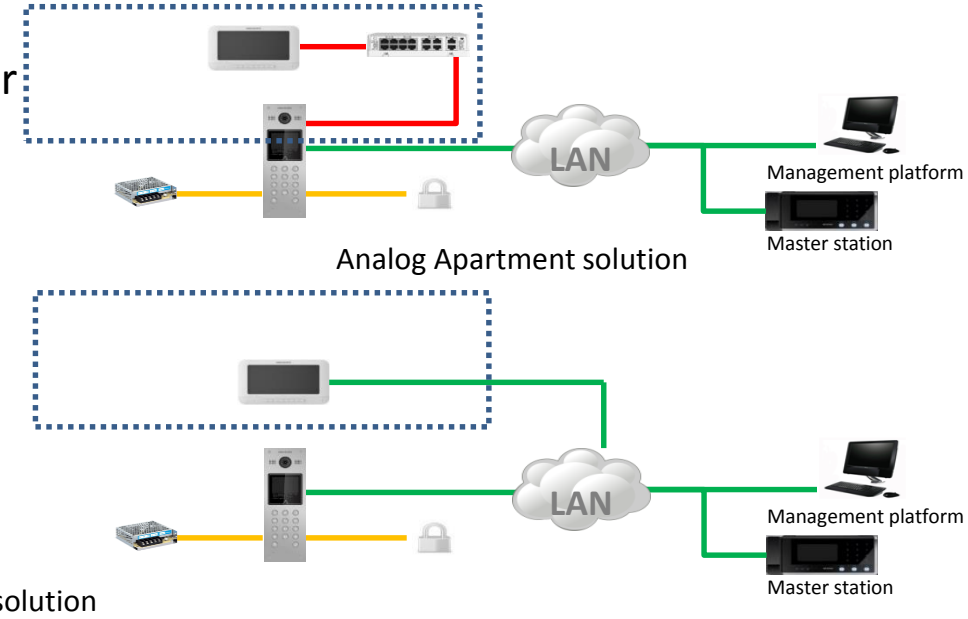

UTP for analog

RVV

UTP for IP

Analog indoor station saves a lot compared with IP indoor station. The solution is suitable for low budget apartment intercom requirement.

IP Door Station



DS-KD3002-VM

1.3 Million Pixel

Auto Capturing Pictures

3.5-Inch Colorful LCD

120°Wide Angle WDR

IP 65

Visible Light Compensation

Metal Panel

Access Control Function Support 2500 Cards

First Choice for Security Professionals

Analog Indoor Station



DS-KH3200-L

7-Inch
Colorful LCD Screen
with Resolution
800 * 480

4 Zones Alarming


Power Over Network Cable

Remote Unlock


Live View

Echo Cancellation & Noise Suppression

Analog Distributer

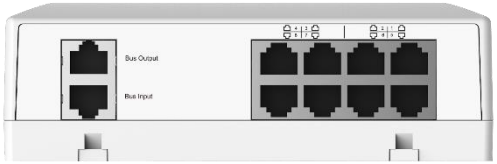

DS-KAD308

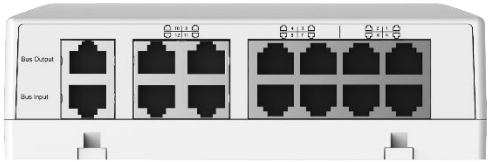

DS-KAD312

- 8/12 channel connection with indoor station
- Convenient flat&room NO. configuration by DIP switch
- Power over network cable for indoor station
- Maximum 15 distributer cascade within 100m
- Maximum support 64/96 indoor stations per floor due to DIP switch limitation


Content

Analog Apartment Solution Overview

System Architecture& Function Introduction


Solution Highlights

System Architecture with Distributer

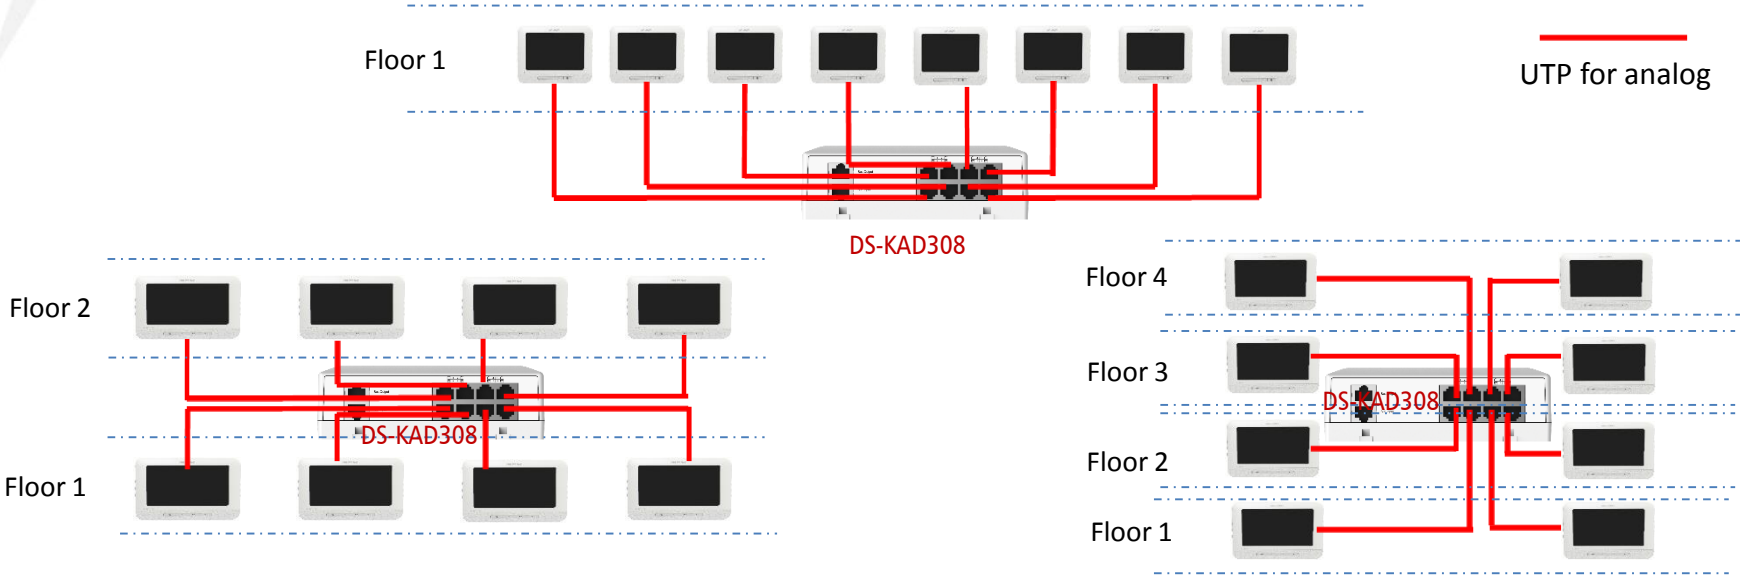


- Easy to configure the DS-KAD308 by DIP switch for different community which has 2/4/8 flats per floor
- Easy to configure the DS-KAD312 by DIP switch for different community which has 2/3/4/6/12 flats per floor

System Architecture with Distributer

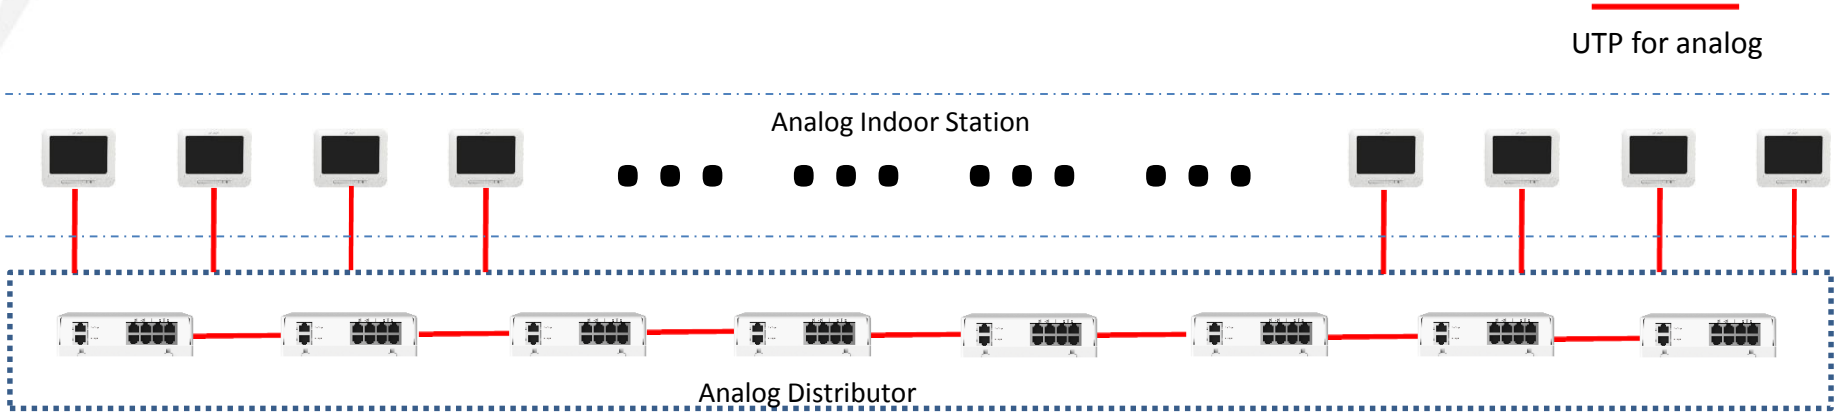


- Due to DIP switch rules, maximum cascading quantity of distributer in same floor is 8.DS-KAD308 supports 64 flats maximum per floor,DS-KAD312 supports 96 flats maximum per floor.

System Maximum Capacity

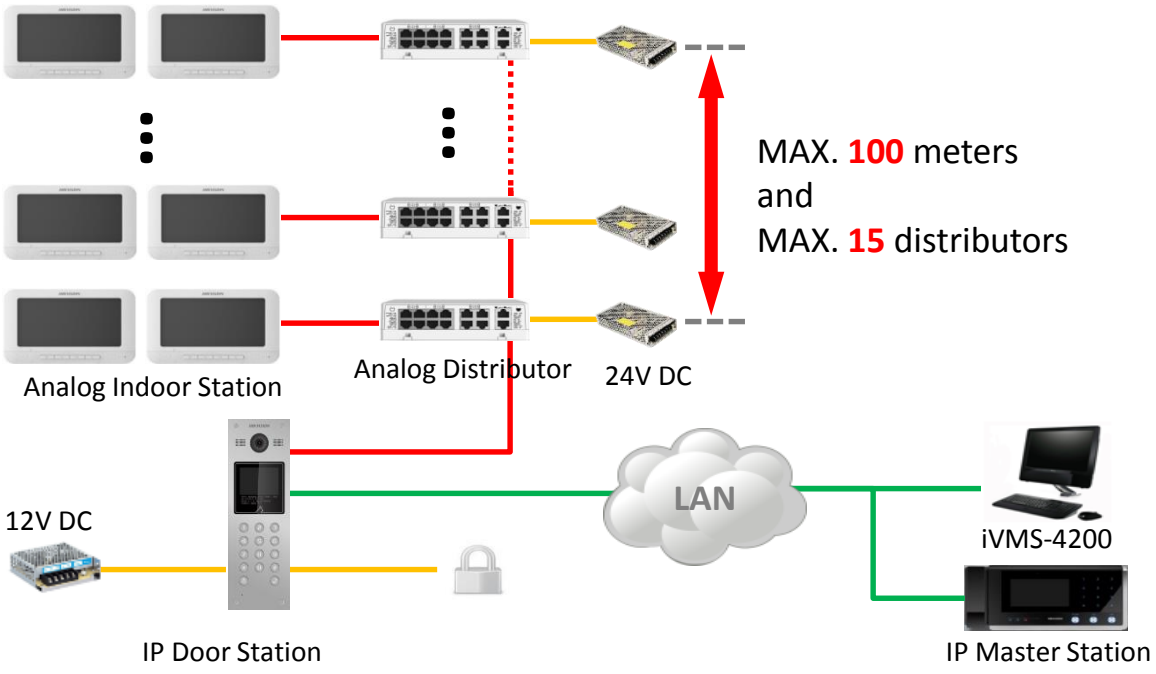

Two RJ45 ports on IP door station

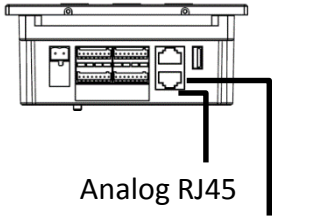


UTP for analog

RVV

UTP for IP

Support Maximum 15 distributers cascading within 100m

Typical System Architecture In Real Case

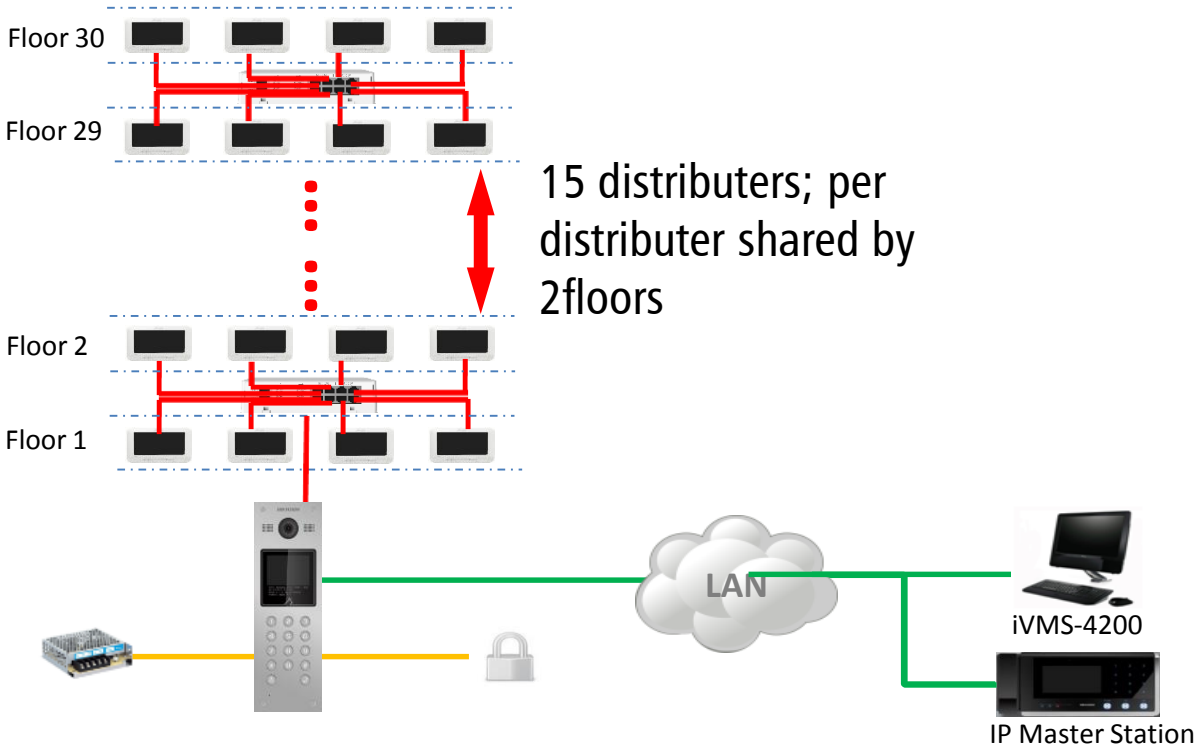


UTP for analog

RVV


UTP for IP

Typical case for 30 floors and 4 flats per floor project. Totally 120 flats system capacity or 180 flats capacity when using DS-KAD312

Function of Analog Apartment Solution

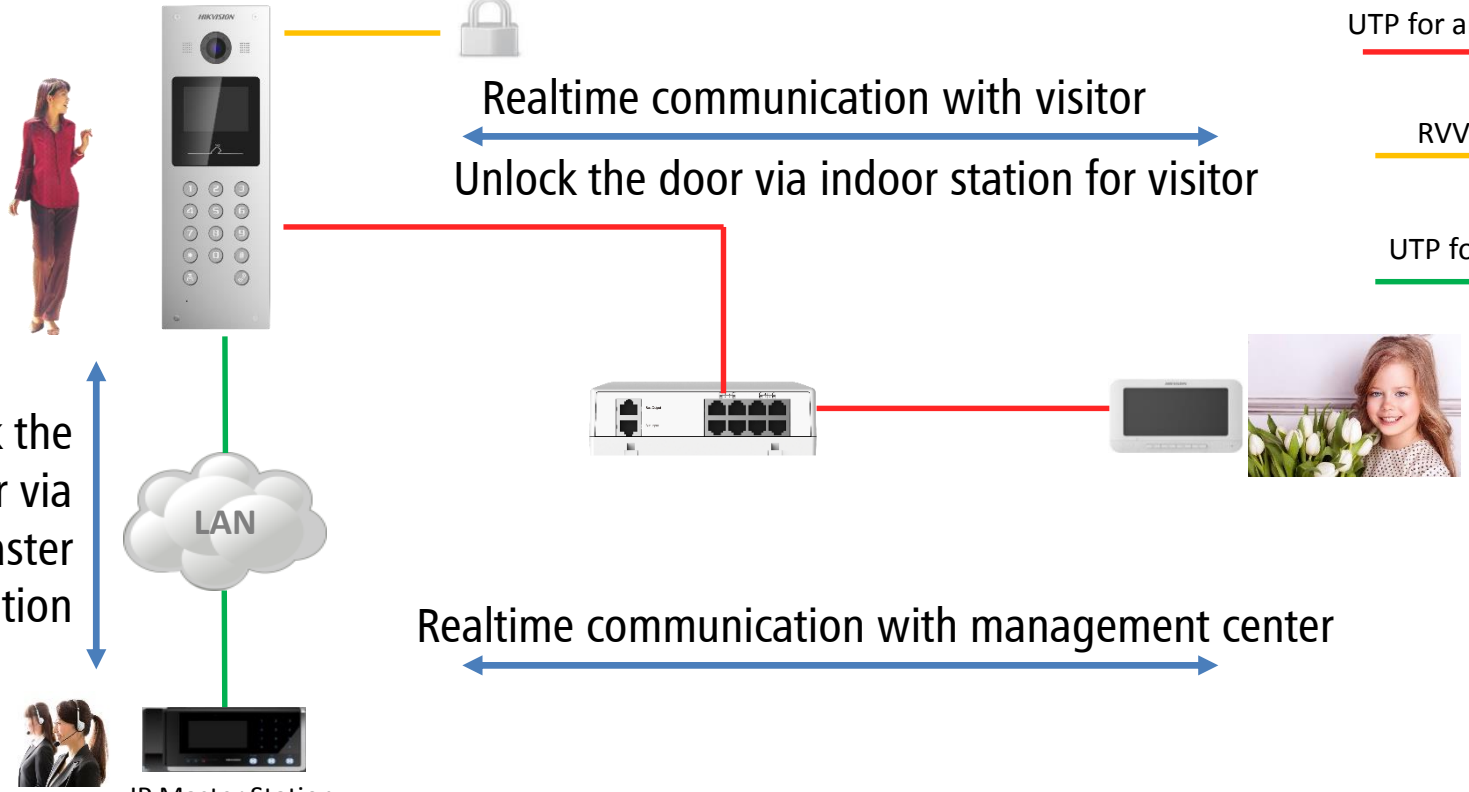


Support External Reader for Two-way Access Control

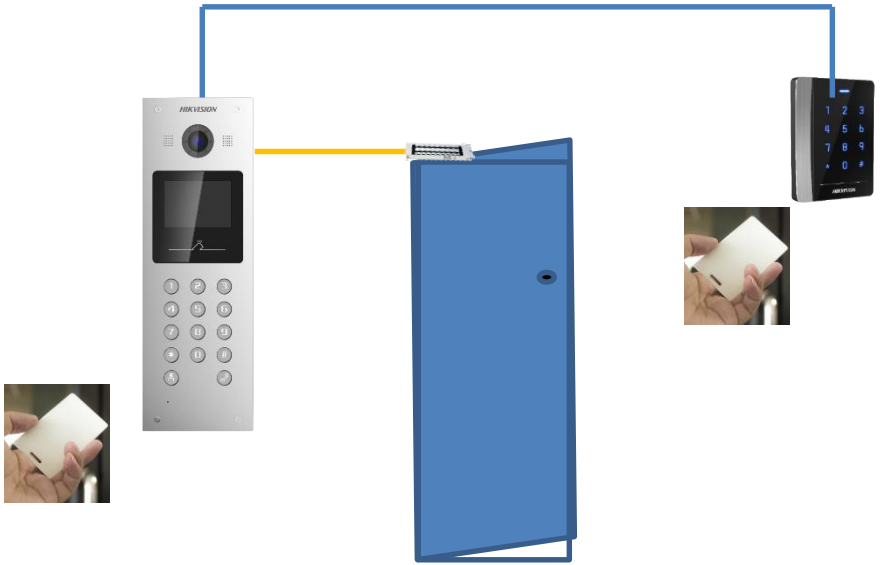

Wiegand

RVV


Support Live View Via Door Station

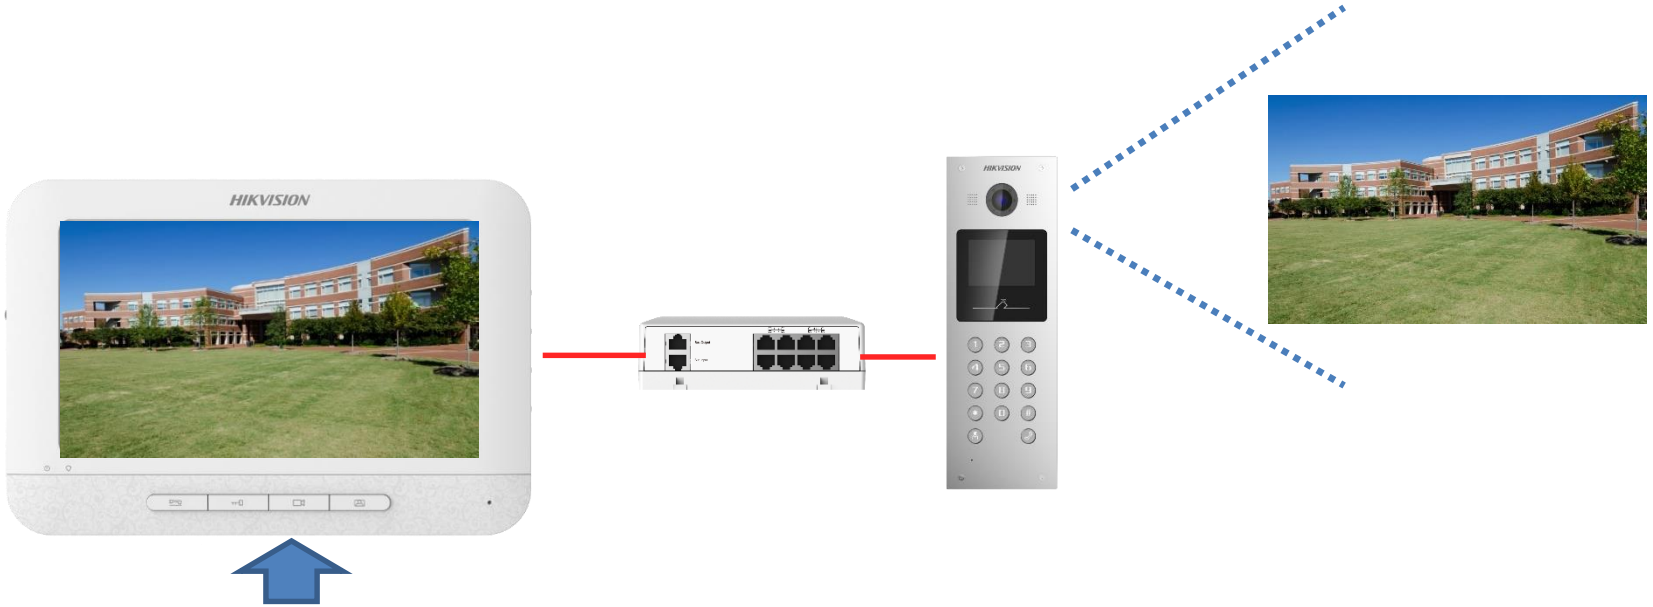


Physical live view button

Support live view of door station camera via indoor station

Support Integration with Elevator Controller

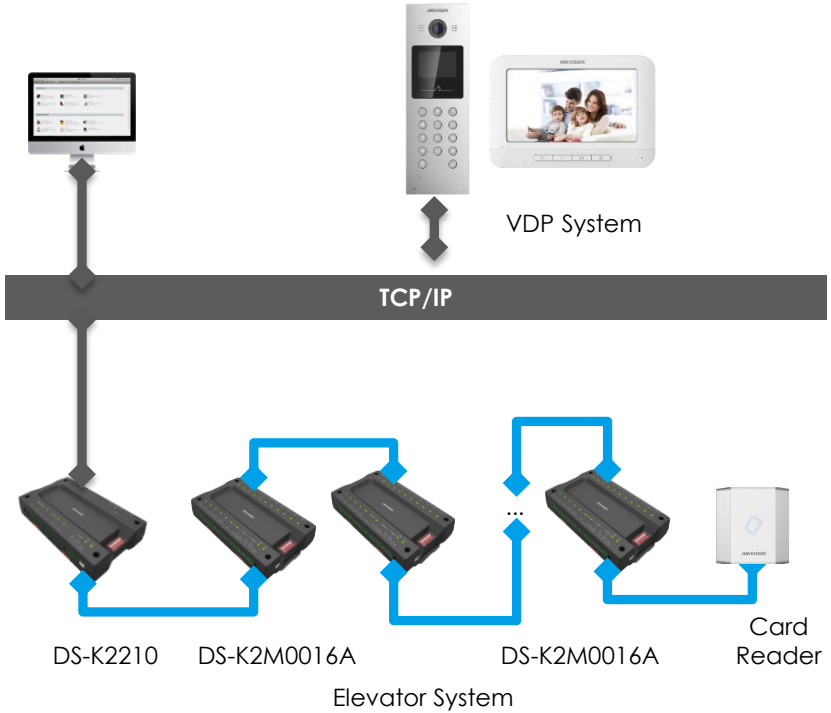

- When visitor dial user, user can call elevator to go to the ground floor
- When user call elevator, elevator will go to user's floor

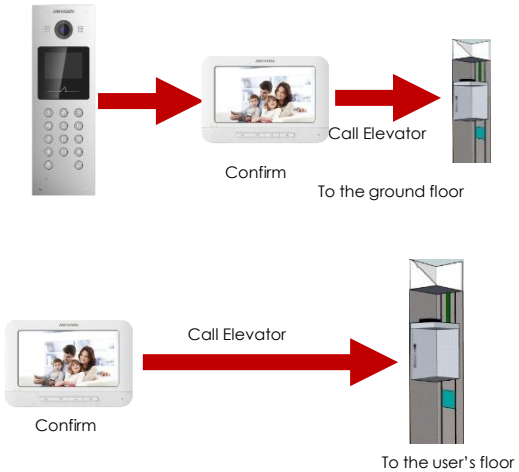

Content

Analog Apartment Solution Overview

System Architecture& Function Introduction

Solution Highlights

Solution Highlight



1 Plug and Play

2 More Economical

3 Easy to Install and Wiring

4 Remote Upgrade

5 No Platform Configuration required

6 Simple Operation



Hikvision Digital Technology Co., Ltd.
No.555 Qianmo Road, Binjiang District
Hangzhou 310052, China
T +86 571 88075998
F +86 571 89935635
overseasbusiness@hikvision.com

www.hikvision.com

Oversea Product Presales Team