iDS-2CD9396-HIS
9 MP IR GMOS ANPR Traffic Camera



- High quality imaging with 9 MP resolution(1'' GMOS)
- Excellent low-light performance, color: 0.001 Lux@(F1.4, AGC ON), B/W: 0.005 Lux @ (F1.4, AGC ON), 0 Lux with IR
- Efficient H.265 compression technology
- 3D DNR technology delivers clean and sharp images
- Built-in micro SD/TF card slot, up to 512 GB
- Support license plate recognition (LPR)
- Vehicle feature recognition: vehicle type / color / manufacturer / license plate color recognition, no-plate vehicle capture
- Violation behaviors detection: driving on lane line, lane change, wrong-way driving detection, seatbelt, phone call, U-Turn, red light running, failing to yield for pedestrians, not following directional sign and stop vehicle on intersection detection.
- Application Scenarios: highway, tunnel, toll station, urban road, etc.

▪ Specification


Camera	
Image Sensor	9 MP (1'' GMOS)
Max. Resolution	4096 × 2160
Min. Illumination	Color: 0.001 Lux @ (F1.4, AGC ON), B/W: 0.005 Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutter Time	7 us-20000 us
Day & Night	IR cut filter
Video	
Main Stream	50 Hz: 50 fps (4096 × 2160, 3840 × 2160, 3392 × 2008, 3072 × 1728, 2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz: 30 fps (4096 × 2160, 3840 × 2160, 3392 × 2008, 3072 × 1728, 2688 × 1520, 1920 × 1080, 1280 × 720)
Sub Stream	50 Hz: 50 fps (3392 × 2008, 2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz: 30 fps (3392 × 2008, 2688 × 1520, 1920 × 1080, 1280 × 720)
Third Stream	50 Hz: 50 fps (1920 × 1080, 1280 × 720) 60 Hz: 30 fps (1920 × 1080, 1280 × 720)
Video Compression	Main stream: H.265/H.264/MJPEG, Sub-stream: H.265/H.264/MJPEG, Third stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 16 Mbps
H.264 Type	Baseline profile/Main profile/High profile
H.265 Type	Main profile
Scalable Video Coding (SVC)	H.264 and H.265 encoding
Network	
Protocols	TCP/IP,ICMP,HTTP,HTTPS,FTP,DNS,RTP,RTSP,RTCP,NTP,SNMP,802.1X,IPv4/IPv6,UDP,ISUP,ARP,IGMP,SMTP
Simultaneous Live View	Up to 10 channels
API	ISAPI,SDK,ISUP,ONVIF (PROFILE S, PROFILE G, PROFILE T, PROFILE M)
User/Host	Up to 16 users,3 user levels: administrator, operator, and user
Security	Password protection,Complicated password,HTTPS encryption,Control timeout settings,802.1X authentication (EAP-PEAP, EAP-LEAP, EAP-MD5),Basic and digest authentication for HTTP/HTTPS,WSSE and digest authentication for ONVIF
Network Storage	Micro SD/TF card (512 GB),Local storage,CVR,NVR,ANR
Client	Hik-Central Master,Hik-Central Pro,HikCentral Master Lite
Web Browser	Chrome V61+, IE9 to IE11, Firefox V41+, Edge
Image	
Image Settings	Saturation, brightness, contrast, sharpness, AGC, and white balance are adjustable by client software or web browser.
Day/Night Switch	Auto, Schedule, Manual
SNR	60 dB
Image Enhancement	BLC, 3D DNR
Interface	
Ethernet Interface	2 RJ45 10 M/100 M/1000 M self-adaptive Ethernet port(s)
On-board Storage	Built-in memory card slot, supporting microSD/SDHC/SDXC card, up to 512 GB

Alarm	2 input interfaces (T1, SYNC), 7 output interfaces
RS-485	3 RS-485 interfaces (half duplex, HIKVISION)
RS-232	1 RS-232 interface
USB	1 USB 2.0 interface
Event	
Basic Event	HDD error,Network disconnected,IP address conflict, traffic light detector exception
Road Traffic and Vehicle Detection	
Coverage	up to 3 lanes
Trigger Mode	External I/O trigger/Radar trigger/Video trigger
Smart Function	License plate recognition,Vehicle type classification,Vehicle color recognition,No-plate vehicle capture,Moving direction detection
LPR Countries/Regions	Middle East: The United Arab Emirates (Abu Dhabi, Ajman, Dubai, Fujairah, Ras Al Khaimah, Sharjah and Umm Al Quwain), Qatar, Iraq, Egypt, Jordan, Kuwait, Saudi Arabia, Pakistan, Oman, Lebanon, Bahrain, Africa: Nigeria, Kenya, Ivory Coast , South Africa, Tanzania, Mauritius, Morocco, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Senegal, Algeria, Asia-Pacific: Australia, New Zealand, Indonesia, Malaysia, Singapore, South Korea, Thailand, Vietnam, the Philippines, Hong Kong, Macao, Taiwan, Myanmar, India, Mongolia, Cambodia, Laos, Bangladesh, Nepal, Sri Lanka, America: Canada, Argentina, Chile, Paraguay, Uruguay, El Salvador, Bolivia, Colombia, Brazil, Ecuador, Peru, Mexico, Panama, Costa Rica, Trinidad and Tobago, the Dominican Republic, Guatemala, Europe: Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, the Republic of North Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, the UK, Ireland, Germany, Italy, Austria, Israel, Palestinian, Belgium, Luxembourg, Albania, Kosovo, Serbia, Romania, Montenegro, Denmark, Finland, Sweden, Slovenia, Portugal, Malta, Cyprus, Iceland, Liechtenstein, Bosnia and Herzegovina, Russian-Speaking Regions: Azerbaijan, Belarus, Kazakhstan, Lithuania, Georgia, Estonia, Latvia, Russia, Ukraine, Moldova, Uzbekistan, Kyrgyzstan, Armenia, Turkmenistan, Tajikistan
No License Plate Detection	Supported
Accuracy (Under recommended installation and lighting conditions)	Capture rate > 99%, Vehicle moving direction recognition accuracy > 98.5%, LPR accuracy > 98%, Mistaken capture rate < 2%
Motorcycle LPR	Supported
Vehicle Type	Car,Van,Bus,Truck,Light Truck,SUV(MPV),Pickup,Motorcycle,Tricycle
Vehicle Color	Red, yellow, green, blue, pink, purple, cyan, brown, white, grey, black Recognizable at daytime only.

Vehicle Manufacturer	212 Manufacturers: AC SCHNITZER, AITO, APOLLO, Ashok Leyland, Audi, Aston Martin, Acura, Ankai, Ayvip, Alfa Romeo, Asiastar, Artega, ARCFOX, BAIC, Beiben Truck, BLUECAR, Bedford, Benz, BMW, BYD , Bufori, Buick, Bently, Brabus, Bugatti, Borgward, BONLUCK, Besturn, CADILLAC, Celis, Chevrolet, Citroen, Chery, Chrysler, Chang an, CNHTC, CHTC, Caterham, Conquest, C&C Trucks, CAMC, DAIHATSU, DMC, DS, Dacia, Dongnan, Dodge, Dongwo, Denza, Dongfeng, Daewoo, Dima, Denway, DORCEN, Eicher, Emgrand, Equss, EXEED, Ford, FORO, Fornasari, Ferrari, Fuqi, Fiat, Fisker, FQT Motor, Foton, FAW, FORLAND, FUSO, Force Motors, Fxauto, Faralli Mazzanti, GAC, Great Wall, GMC, Geely, Geometry, Hyundai, HENNESSEY, HINO, Honda, Haima, Haval, Hongqi, Isuzu, Infiniti, Iveco, IAT, IM, JAC, JBC, JEEP, Jaguar, JMC, JETOUR, JETTA, Joylong ,Koenigsegg, KIA , Kia-Borrego, King Long, Kama, KTM, LEVC, Lexus, Land Rover, Lincoln, Lamborghini, Lotus, Luxgen, Levdeo, Leopaard, Lynk & Co , Lada, Leading Ideal, LEAPMOTOR, LUMMA, Lorinser, Land Wind, MAN Trucks , MAXUS, MG, MINI, Mahindra, Mitsuoka, Maserati, Meiya , McLaren, Maybach, Mazda, Morgan, Mitsubishi, Mustang, Marvel R, Maple, MANSORY, Modern, NOMA, Nissan, Norinco, Neoplan, NIO, NETA, Opel, Ora, Oushang, Perodua, Porsche, Peugeot, PGO, Proton, Pagani, Polestar, POCCO, Qoros, RAM, Rolls-Royce, Renault, Roewe, Rohens, Ranz, Ruilan, Radar, Renault Samsung, SAAB, SCANIA , SCION, SMART, SML ISUZU, Suzuki, SAIC Datong, Subaru, Skoda, Startek, Soyat, Seat , SWM, Sany, SsangYong, Sojen, Silver, SATE, SOL, Skyworth, SGMW, SITECH DEV, TATA, Tankar, Tesla, Trumpchi, Techart, Toyota, UD, UAES, Volkswagen, VINFAST, Venucia, Volvo, VOYAH, VeiculoLongo, Weltmeister , XCMG, Xinyuan, XPENG, Yutong, YAMAHA, Zhonghua, Zotye, Zhinuo, ZEEKR, Zenvo
License Plate Color Recognition	Customized to support
U-Turn	Supported (only E-Police mode)
Red Light Running	Supported (only E-Police mode)
Failing to Yield for Pedestrians	Supported (only E-Police mode)
Stop Vehicle on Intersection	Supported (only E-Police mode)
Not Following Directional Sign	Supported (only E-Police mode)
Yellow Box Junction Violation	Support (only E-Police mode)
Driving on Lane Line Detection	Supported (only in strobe light mode)
Lane Change Detection	Supported (only strobe light mode)
Seatbelt Detection	Supported (with flash supplement light)
Phone Call Detection	Supported (with flash supplement light)
Vehicle Window Film	Supported (with flash supplement light)
Wrong-Way Driving Detection	Supported
Emergency Lane Occupation	Supported (truck forbidden lane, emergency lane, urban bus lane)
Prohibition Mark Violation	Supported
Speeding	Supported (with Radar)
Low-Speed	Supported (with Radar)
Without Helmet	Supported
Manned Non-Motor Vehicle	Supported
Capture Speed Range	10 to 320 km/h
General	
Operating System	Linux

Power	12 VDC ± 10%; Max. 13 W
Material	Aluminum alloy
Dimension	With package: 79 × 69 × 161.17 mm (3.11" × 2.72" × 6.35")
Weight	0.98 ± 0.1 kg (2.16 ± 0.22 lb)
Storage Condition	-30 °C to 70 °C (-22 °F to 158°F). Humidity: 5% to 95% (non-condensing)
Operating Condition	-30 °C to 70 °C (-22 °F to 158°F). Humidity: 5% to 95% (non-condensing)
General Function	Password protection,Three streams,Heartbeat,One-key reset,Pixel counter
Language	8 languages: English, Thai, Croatian, Korean, Russian, Traditional Chinese, Ukrainian, Spanish

▪ Dimension

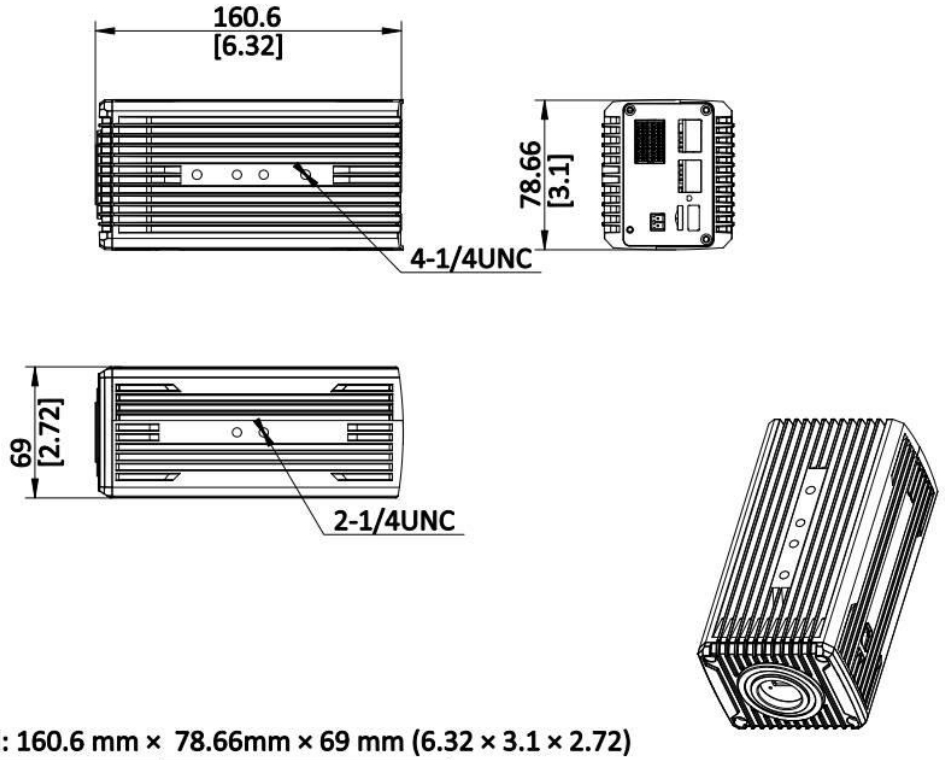

L × W × H: 160.6 mm × 78.66mm × 69 mm (6.32 × 3.1 × 2.72)

Camera Mounting Hole[mm]	Camera Mounting Hole[inch]
	6-1/4UNC

Unit: mm [inch]

SCALE	1:1

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®